


# DDA-1103


## Dual 1x4 AES/EBU Distribution Amplifier

### BACK MODULES

#### 1RU

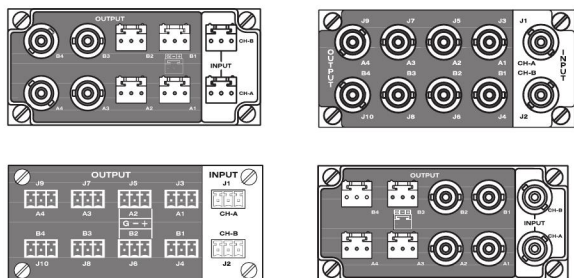

#### 2RU

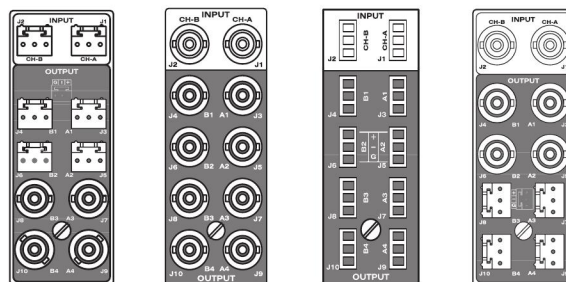

### SPECIFICATIONS

Specifications are subject to change without notice.

#### INPUT

Signal Format.....AES3

Connector.....3Pin

Impedance.....110  $\Omega$

Signal Format.....AES-3id

Connector.....BNC

Impedance.....75  $\Omega$

#### OUTPUT

Signal Format.....AES3

Connector.....3Pin

Impedance.....110  $\Omega$

Signal Format.....AES-3id

Connector.....BNC

Impedance .....75  $\Omega$

#### PERFORMANCE

Quantization.....24 bits

Jitter.....<0.02 UI

Amplitude.....4.5 V  $\pm$ 10%, balanced

0.9 V  $\pm$ 10%, unbalanced

#### ELECTRICAL

Power.....4 W

#### ENVIRONMENTAL

Operating Temperature.....32° ~ 104° F (0° ~ 40° C)

Relative Humidity.....10% ~ 90%