


DDS-5103

DS3 3x1 Changeover


FEATURES

- Manual and auto control
- Detection of DS3 input presence
- Provides two additional outputs
- By-pass protection
- Non-volatile memory
- Hot-swappable
- Computer software control supported

BACK MODULE



BLOCK DIAGRAM

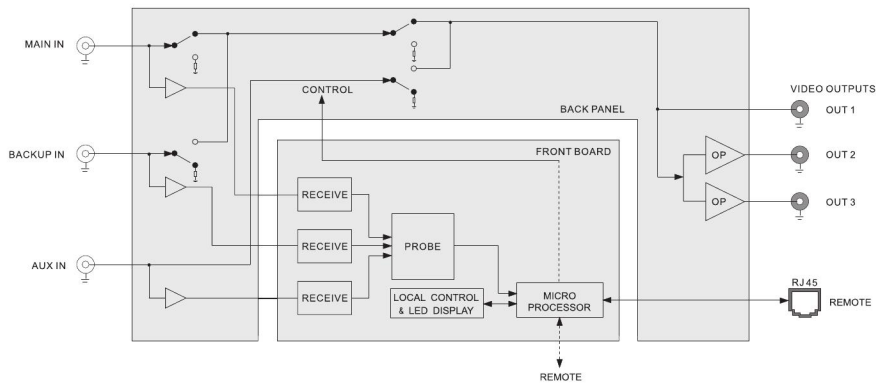

SPECIFICATIONS

Specifications are subject to change without notice.

DS3 INPUT

Connector.....BNCx3

DS3 OUTPUT

Connector.....BNCx3

REMOTE PORT

Connector.....RJ45x1

ELECTRICAL

Power.....±12 V DC power inputs

ENVIRONMENTAL

Operating Temperature.....32° ~ 104° F (0° ~ 40° C)

Relative Humidity.....10% ~ 90%