


The SDA-1104 is a 1x8 SDI/ASI distribution amplifier (DA). It is used in i-MOD platform. The module provides a single-channel DA with 8 SDI/ASI outputs for 1 input. The first output supports power-off protection. Thus signal can be output continuously when module is removed or power is off.

The SDA-1104 can be controlled locally by means of an intuitive card-edge interface or remotely using i-MOD platform control software IM-MASTER.


## FEATURES

- 1 SDI/ASI input, 8 SDI/ASI outputs
- Supports DVB-ASI, SMPTE 259M A , B , C , D (143, 177, 270, 360 Mbps) signal and digital signal from 10 to 540 Mbps
- The first output is power-off protected
- Non-volatile memory
- Hot-swappable
- IM-MASTER control supported


## BLOCK DIAGRAM

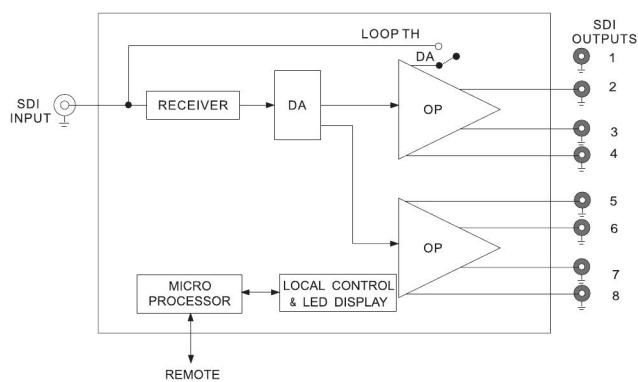

## BACK MODULES

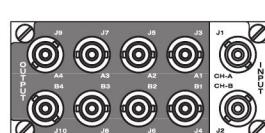

1RU

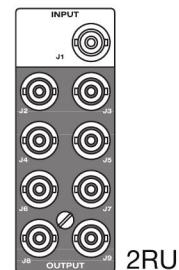

2RU

## SPECIFICATIONS

Specifications are subject to change without notice.

### INPUT

Signal Format.....	SMPTE 259M, DVB-ASI
Connector.....	BNC (x1)
Impedance.....	75 Ω
Return Loss.....	>15 dB @ 270 MHz

### OUTPUT

Signal Format.....	SMPTE 259M, DVB-ASI
Connector.....	BNC (x8)
Impedance.....	75 Ω
Return Loss.....	>18 dB @ 270 MHz >15 dB @ 360 MHz
Amplitude.....	800 mVp-p ±10%

### PERFORMANCE

Jitter.....	<0.2 UI
Overshoot.....	<10% of amplitude
Rise/Fall Time.....	400 ~ 1500 ps, 20% ~ 80% of amplitude
Rise/Fall Time Diff.....	<500 ps

### ELECTRICAL

Power.....	2 W
------------	-----

### ENVIRONMENTAL

Operating Temperature.....	32° ~ 104° F (0° ~ 40° C)
Relative Humidity.....	10% ~ 90%